

COUDES & TES DE REGLAGE

FONCTION



Isolement du radiateur,
Réglage du débit de retour, équilibrage des circuits.

CONSTRUCTION

Corps laiton matricé,
nickelé (sauf 1" et 1"1/4 : laiton brut).
Joint d'étanchéité entre corps et douille
(sauf 1" et 1"1/4)



COTES

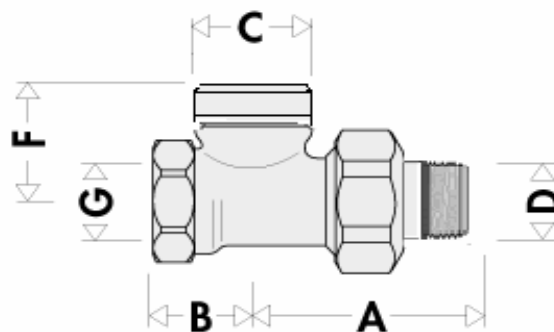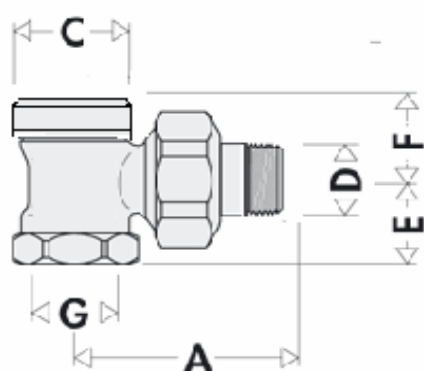

Coudes

	G	A	C	D	E	F	Poids
CR12N	3/8"	46.5	21	3/8"	24	17	0.116
CR15N	1/2"	54	21	1/2"	24	17	0.156
CR20N	3/4"	59	30	3/4"	25	30	0.322
CR26	1"	73	44	1"	33.5	51.5	0.550
CR33	1"1/4	84.5	58	1"1/4	39.5	62.5	0.963

Tés

	G	A	B	C	D	F	Poids
TR12N	3/8"	42.5	22.5	21	3/8"	27.5	0.128
TR15N	1/2"	44.5	23.5	21	1/2"	26	0.156
TR20N	3/4"	54	29	30	3/4"	38	0.351
TR26	1"	67	42	44	1"	70	0.654
TR33	1"1/4	80	43	44	1"1/4	70	0.844

courbes de pertes de charge

